



SecuTAC 600



Introduction

SecuTac 600 is new generation multiple biometric identification product, standard integrating with face, finger print, pin recognition, and optional with RFID Mode, as to facial identification algorithm, it capture the relative position,size,shape of user's eyes,nose,cheek bones and jaw features, these feature templates are used to be matching feature data, when users verify on device, it distills captured features in to values and compares with template to eliminate variance.SecuTac 600 holds 400 faces(optional 3000) without dividing groups,its default identification mode is fingerprint and face,additionally as it is a kind of professional access control facial device, it may work with third party such as electric lock,alarm,door bell,sensor,inorder to improve security for human life and enterprise information.


secuTAC

Features:


- Elegant ergonomic design
- Default verification mode is Fingerprint & Face, available to choose other 19 modes, such as RFID & Face, Password & Face, Fingerprint only or RFID only
- TCP/IP, RS232/485 communication and USB Host.
- 3.0 inch TFT touch screen, T9 Input, 9 Digit User ID.
- 2 user-defined function keys, the left one is for door belling, the right one is for shift of identification mode.
- Infra-red optical system enables user-identification in poorly lit environments.
- Wiegand input for working with wiegand reader, wiegand output for connecting to access control panel.
- Optional with ID card module or Mifare card module
- Professional access control compatible with the 3rd party door sensor, alarm, exit button, wired bell and electric lock.
- 50 time zones, 99 groups and 10 unlock combinations, anti-pass back and dismantle function.

Configuration:

Standalone

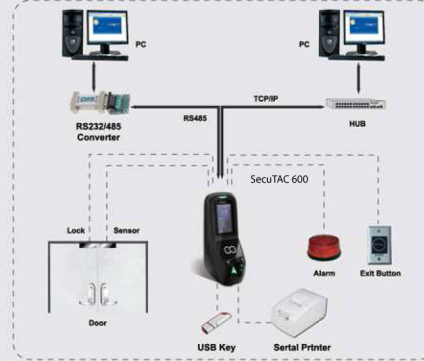

Work Together with Controller

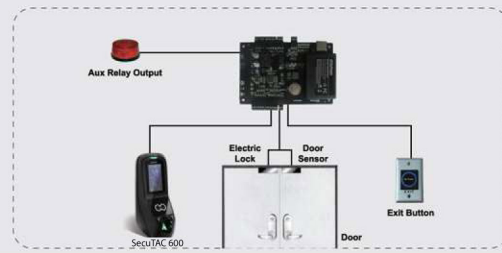

Specifications:

CPU	Multi-Bio CPU 630MHz
Memory	256M Flash, 64M SDRAM
Hardware Platform	ZEM600
Fingerprint Sensor	Optical Sensor
Camera	High Resolution Infrared Camera
Display	3 Inch Touch Screen
Face Capacity	400(optional 3000)
Fingerprint Capacity	2000(optional 5000)
ID Card Capacity	10,000(optional function)
Logs Capacity	100,000
Algorithm Version	Face7.0(optional Face5.0) & Finger10.0/9.0
Communication	TCP/IP, RS232/485, USB Host
Access Control Interfaces for	3rd party electric lock, door sensor, alarm, wired bell and exit button
Anti-pass back Function	OK
Wiegand Signal	Wiegand in and out
Optional Functions	ID Card, Mifare card
Power Supply	12V/3A
Operating Temperature	0°C -45°C
Operating Humidity	20%-80%
Dimension	275(L)*100(H)*195(W) mm
Gross Weight	0.87 kg



For more information contact:
 Cardz Middle East
 PO Box: 95781, Dubai, United Arab Emirates
 Tel: +97142293780, Fax: +97142293790